

epcom[®]

Professional Video Surveillance Solutions

XVT-324 / XVT-332 HIGH PERFORMANCE TURBO HD DVR



FEATURES AND FUNCTIONS


- H.264 & Dual-stream video compression
- Support HD-TVI / analog / IP cameras
- Support both HD-TVI and analog cameras with adaptive access
- Full channel@720P resolution real-time recording
- HDMI and VGA output at up to 1920x1080P resolution
- Long transmission distance over coax cable
- Support up to 24/32-ch synchronous playback at 1080P resolution
- Standalone DVR LINUX embedded

Model:	XVT-324	XVT-332
Video/Audio Input		
Analog and HD-TVI video input:	24-Ch	32-Ch
Audio Input:	4-ch	
Video Compression:	H.264	
Supported camera types:	720p/60Hz, 1080p/30Hz, CVBS	
IP Video Input:	8-ch (up to 32-ch) Up to 2MP resolution	
Video Input Interface:	BNC (1.0 Vp-p, 75Ω)	
Audio Compression:	G.711u	
Audio Input Interface:	RCA (2.0 Vp-p, 1 kΩ)	
Two-way Audio:	1-ch RCA(2.0Vp-p, 1kΩ)	
Video/Audio Output		
HDMI/VGA Output:	1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60 Hz	
Recording resolution:	1080p/720p/VGA/WD1/4CIF/CIF	
Frame Rate:	Main stream:1080p@12fps;720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream:WD1/4CIF@12fps;CIF/QCIF/QVGA@25fps (P)/30fps (N)	
Video Bit Rate:	32 Kbps-6 Mbps	
Stream Type:	Video/Video&Audio	
Audio Output:	1-ch RCA(Linear, 1kΩ)	
Audio Bit Rate:	64kbps	
Dual Stream:	Support	
Playback Resolution:	1080P/720P/VGA/WD1/4CIF/CIF/QVGA/QCIF	
Synchronous Playback:	24-ch	32-Ch
Network management		
Network protocols:	TCP/IP, PPPoE, DHCP, EZVIZ Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS	
Hard Disk Driver		
Interface Type:	4 SATA interfaces for 4 HDDs; 1 eSATA interface	
Capacity:	Up to 6 TB capacity for each disk	
External Interface		
Network Interface:	1; 10M / 100M / 1000M self-adaptive Ethernet interface	
USB Interface:	3 USB2.0 interfaces	
Serial Interface:	1RS-485 interface, 1 RS-232 interface, 1 RS-485 keyboard interface	
Alarm Input:	16-ch	
Alarm Output:	4-ch	

General

Power Supply:	100 ~ 240VAC, 47 ~ 63HZ	
Consumption:	≤ 55W	≤ 65W
Working Temperature:	-10 °C ~+55 °C (14 °F ~ 131 °F)	
Working Humidity:	10% ~ 90%	
Chassis:	19-inch rack-mounted 1.5U chassis	
Dimensions:	445 × 390 × 70 mm (17.5 × 15.3 × 2.7 inch)	
Weight:	≤5Kg (11.0lb)	

Physical Interfaces

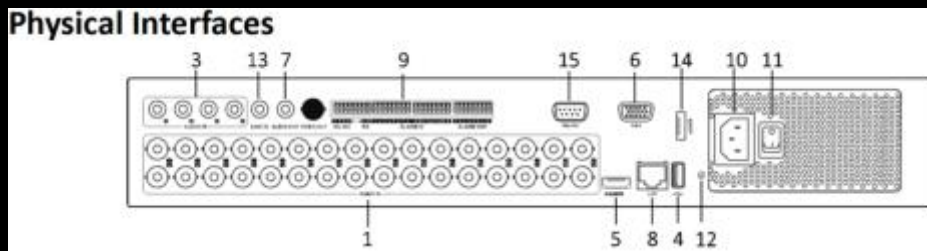

The XVT-324 rear panel provides 24 video input interfaces

Index	Description	Index	Description
1	VIDEO IN	9	RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT
2	AUDIO IN, RCA Connector	10	100 to 240 VAC Power Input
3	USB Interface	11	Power Switch
4	HDMI Interface	12	GND
5	VGA Interface	13	LINE IN
6	VGA AUDIO OUT	14	eSATA Interface
7	LAN Network Interface	15	RS-232 Serial Interface
8	VIDEO IN		

epcom[®]

Professional Video Surveillance Solutions